


SPIRALDICHTUNGEN

SPIRALDICHTUNGEN NACH EN1514-2 FÜR FLANSCH GEMÄSS DIN

TYP
HST-SPW-IO

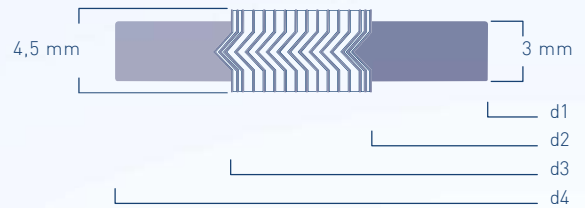

BESTELLBEISPIEL
TYP HST-SPW-IO, 1.4571/GRAPHIT, DN40 PN40 NACH EN1514-2

DN \ PN	d1		d2		d3		d4					
	10-250		10-40	63-250	10	16	25	40	63	100	160	
10	18	24	34	34	-	-	-	46	56	56	56	
15	23	29	39	39	-	-	-	51	61	61	61	
20	28	34	46	-	-	-	-	61	72	72	-	
25	35	41	53	53	-	-	-	71	82	82	82	
32	43	49	61	-	-	-	-	82	-	-	-	
40	50	56	68	68	-	-	-	92	103	103	103	
50	61	70	86	86	-	-	-	107	113	119	119	
65	77	86	102	106	-	-	-	127	137	143	143	
80	90	99	115	119	-	-	-	142	148	154	154	
100	115	127	143	147	-	162	168	168	174	180	180	
125	140	152	172	176	-	192	194	194	210	217	217	
150	167	179	199	203	-	217	224	224	247	257	257	
200	216	228	248	252	-	272	284	290	309	324	324	
250	267	279	303	307	327	328	340	352	364	391	388	
300	318	330	354	358	377	383	400	417	424	458	458	
350	360	376	400	404	437	443	457	474	486	512	-	
400	410	422	450	456	488	495	514	546	543	572	-	
500	510	522	550	556	593	617	624	628	657	704	-	
600	610	622	650	656	695	734	731	747	764	813	-	
700	710	722	756	762	810	804	833	852	879	950	-	
800	810	830	864	870	917	911	942	974	988	-	-	
900	910	930	964	970	1017	1011	1042	1084	1108	-	-	
1.000	1010	1030	1074	1080	1124	1128	1154	1194	-	-	-	

d1: INNENRING INNENDURCHMESSER
d2: DICHTZONE INNENDURCHMESSER
d3: DICHTZONE AUSSENDURCHMESSER
d4: AUSSENRING AUSSENDURCHMESSER