


SPIRALDICHTUNGEN

SPIRALDICHTUNGEN NACH EN1514-2²⁰¹⁴ FÜR DIN-FLANSCH

TYP
HST-SPW-IO

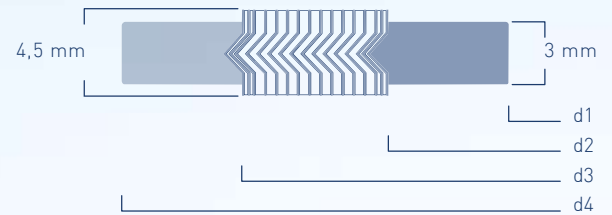

BESTELLBEISPIEL

TYP HST-SPW-IO, 1.4571/GRAPHIT, DN40 PN40 NACH EN1514-2

DN \ PN	d1		d2		d3		d4				
	10-250	10-40	63-250	10	16	25	40	63	100	160	
10	18	24	34	34	-	-	-	46	56	56	56
15	23	29	39	39	-	-	-	51	61	61	61
20	28	34	46	-	-	-	-	61	72	72	-
25	35	41	53	53	-	-	-	71	82	82	82
32	43	49	61	-	-	-	-	82	-	-	-
40	50	56	68	68	-	-	-	92	103	103	103
50	61	70	86	86	-	-	-	107	113	119	119
65	77	86	102	106	-	-	-	127	137	143	143
80	90	99	115	119	-	-	-	142	148	154	154
100	115	127	143	147	-	162	168	168	174	180	180
125	140	152	172	176	-	192	194	194	210	217	217
150	167	179	199	203	-	218	224	224	247	257	257
200	216	228	248	252	-	273	284	290	309	324	324
250	267	279	303	307	327	329	340	352	364	391	388
300	318	330	354	358	377	384	400	417	424	458	458
350	360	376	400	404	437	444	457	474	486	512	-
400	410	422	450	456	488	495	514	546	543	572	-
500	510	522	550	556	593	617	624	628	657	704	-
600	610	622	650	656	695	734	731	747	764	813	-
700	710	722	756	762	810	804	833	852	879	950	-
800	810	830	864	870	917	911	942	974	988	-	-
900	910	930	964	970	1017	1011	1042	1084	1108	-	-
1.000	1010	1030	1074	1080	1124	1128	1154	1194	-	-	-

- d1: INNENRING INNENDURCHMESSER
- d2: DICHTZONE INNENDURCHMESSER
- d3: DICHTZONE AUSSENDURCHMESSER
- d4: AUSSENRING AUSSENDURCHMESSER